


KNURLED HEAD SCREWS

STEEL: 1215, CASE HARDENED, BLACK OXIDE FINISH.
STAINLESS STEEL: 300-SERIES, PASSIVATED



Handy thumb screw. Knurled head provides a positive grip for finger tightening in light clamping applications.

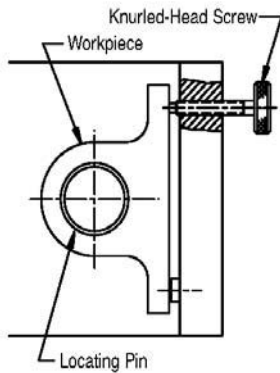

STEEL (INCH)

PART NO.	A THREAD	B	C DIA	D	E	F DIA	G
CL-1-KHS	#10-24	1	3/4	1/4	1/4	.12	.09
CL-2-KHS		1-1/2					
CL-3-KHS		2					
CL-1A-KHS	#10-32	1	1	5/16		.15	.12
CL-1A-KHS-1		1-3/8					
CL-2A-KHS		1-1/2					
CL-2A-KHS-1		1-5/8					
CL-3A-KHS		2					
CL-4-KHS	1/4-20	1-1/2	1	7/16		.20	.16
CL-4-KHS-1		1-3/8					
CL-4-KHS-2		1-3/4					
CL-5-KHS		2					
CL-6-KHS	5/16-18	2-1/2	1-1/8	3/8		.25	.19
CL-7-KHS		1-1/2					
CL-7-KHS-1		1-3/4					
CL-8-KHS	3/8-16	2	1-1/4	7/16	.34	.25	
CL-9-KHS		2-1/2					
CL-10-KHS	1/2-13	2	1-1/4	1/2	.25	.19	
CL-11-KH		2-1/2					
CL-12-KHS	1/2-13	3	1-1/4	1/2	.34	.25	
CL-13-KHS		3					
CL-14-KHS	3-1/2						

STAINLESS STEEL (INCH)

PART NO.	A THREAD	B	C DIA	D	E	F DIA	G
CL-23207	#10-32	3/4	1/2	3/16	1/8	.12	.09
CL-23210		1					
CL-23212		1-1/4					
CL-23215	1/4-20	1-1/2	1	5/16	1/8	.15	.12
CL-23507		3/4					
CL-23510		1					
CL-23512		1-1/4					
CL-23515		1-1/2					
CL-23520	2						
CL-23615	5/16-18	1-1/2	1-1/8	3/8	3/16	.20	.16
CL-23620		2					
CL-23625		2-1/2					
CL-23820	3/8-16	2	1-1/4	7/16	3/16	.25	.19
CL-23825		2-1/2					
CL-23830		3					

STEEL (METRIC)

PART NO.	A THREAD	THREAD PITCH (mm)	B (mm)	C DIA (mm)	D (mm)	E (mm)	F DIA (mm)	G (mm)
CLM-1-KHS	M5	.8	25	19	6.5	6.5	3.4	2.7
CLM-2-KHS-1		.85	35					
CLM-2-KHS		.8	40					
CLM-3-KHS	M6	1	50	25.5	8		4.4	3.3
CLM-4-KHS			40					
CLM-4-KHS-1			45					
CLM-5-KHS			50					
CLM-6-KHS			65					
CLM-7-KHS	M8	1.25	40	28.5	9.5		5.9	4.6
CLM-8-KHS-1			45					
CLM-8-KHS			50					
CLM-9-KHS	M10	1.5	65	32	11		6.9	4.8
CLM-10-KHS			40					
CLM-11-KHS			75					
CLM-12-KHS			75					
CLM-13-KHS	M12	1.75	75	12.5	8.9	6.3		
CLM-14-KHS			90					

