

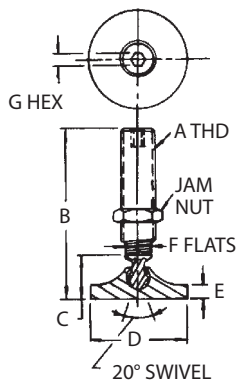


JIG FEET LEVELING

SCREW: 1215 STEEL, CASE HARDENED, ZINC PLATED YELLOW CHROMATE
 FOOT: 1215 STEEL, ZINC PLATED YELLOW CHROMATE



Medium-duty leveling foot with removable pad. Lefthand thread in pad prevents backout while pad rotates and pivots freely.
Patent no. 2,531,892.



INCH




PART NO.	A	B	C	D DIA	E	F	G	*LOAD RATING (LBS)
CL-1-JFL	1/2-13	2-7/32	7/8	1-1/2	1/4	3/8	1/4	1,400
CL-2-JFL		4-7/32						430
CL-3-JFL	5/8-11	3-1/4	29/32	2	5/16	1/2	5/16	2,900
CL-4-JFL		5-1/4						1,200
CL-5A-JFL	3/4-10	3-1/2	1-1/6	2-1/2	3/8	9/16	3/8	3,700
CL-6-JFL		5-17/32						1,800
CL-8-JFL	1-8	5-19/32	1-19/32	3-1/2	1/2	3/4	1/2	6,400

METRIC

PART NO.	A THREAD	THREAD PITCH (mm)	B (mm)	C (mm)	D DIA (mm)	E (mm)	F (mm)	G (mm)	LOAD RATING (kg)
CLM-1-JFL	M12	1.75	55	22	38	6.5	10	6	630
CLM-2-JFL	M12	1.75	110	22	38	6.5	10	6	190
CLM-3-JFL	M16	2	85	23	51	8	13	8	1300
CLM-4-JFL	M16	2	135	23	51	8	13	8	540
CLM-5A-JFL	M20	2.5	90	27	63.5	9.5	17	10	1600
CLM-6-JFL	M20	2.5	140	27	63.5	9.5	17	10	800
CLM-8-JFL	M24	3	145	41	89	12.5	19	12	2900

JIG FEET LEVELING ASSEMBLIES

MILD STEEL, BLACK OXIDE FINISH



INCH

PART NO.	THREAD SIZE	A	C	D	E	F	H	*LOAD RATING (LBS)
CL-1-JF	3/8-16	3	11/16	1/2	1-1/2	1-3/4	.42	2,300
CL-2-JF	1/2-13	4	7/8	1/2	1-3/4	2	.53	4,200
CL-3-JF	5/8-11	4	1-1/16	5/8	2	2	.63	6,600
CL-4-JF	3/4-10	4	1-1/4	5/8	2	2	.75	10,000
CL-5-JF	1"-8	5	1-5/8	3/4	2	2	1.06	18,000

METRIC

PART NO.	THREAD SIZE	THREAD PITCH (mm)	A (mm)	C (mm)	D (mm)	E (mm)	F (mm)	H (mm)	LOAD RATING (kg)
CLM-10-JF	M10	1.5	75	17	12.5	38	44.5	11	1100
CLM-12-JF	M12	1.75	100	19	12.5	44.5	51	14	1700
CLM-16-JF	M16	2	100	24	16	51	51	16	3200
CLM-20-JF	M20	2.5	100	30	16	51	51	19	4900
CLM-24-JF	M24	3	130	36	19	51	51	27	7200

Complete leveling assembly includes radius-head screw, plate, and hex nut.

* Safe static load with stud securely mounted in a plate at least one-stud-diameter thick, at maximum stud extension (2:1 safety factor). Jig Feet Leveling Assemblies are rated with the standard plate provided.